
PHP 32H300RSB



No. of teeth32Pitch diameter (mm)129.36Pitch diameter (in)5.09Outside diameter (mm)127.99Outside diameter (in)5.04Pulley type1FMin. bore (mm)20Min. bore (in)0.79Max. bore (mm)54Max. bore (in)2.13Flange A (mm)135Flange A (in)5.31H80H (in)3.15
International end of the second sec
Pitch diameter (in)5.09Outside diameter (mm)127.99Outside diameter (in)5.04Pulley type1FMin. bore (mm)20Min. bore (in)0.79Max. bore (in)54Max. bore (in)2.13Flange A (mm)135Flange A (in)5.31H80
Outside diameter (mm)127.99Outside diameter (in)5.04Pulley type1FMin. bore (mm)20Min. bore (in)0.79Max. bore (in)54Max. bore (in)2.13Flange A (mm)135Flange A (in)5.31H80
Outside diameter (in)5.04Pulley type1FMin. bore (mm)20Min. bore (in)0.79Max. bore (in)54Max. bore (in)2.13Flange A (mm)135Flange A (in)5.31H80
Outside diameter (in)5.04Pulley type1FMin. bore (mm)20Min. bore (in)0.79Max. bore (mm)54Max. bore (in)2.13Flange A (mm)135Flange A (in)5.31H80
(in)1FPulley type1FMin. bore (mm)20Min. bore (in)0.79Max. bore (mm)54Max. bore (in)2.13Flange A (mm)135Flange A (in)5.31H80
Pulley type 1F Min. bore (mm) 20 Min. bore (in) 0.79 Max. bore (mm) 54 Max. bore (in) 2.13 Flange A (mm) 135 Flange A (in) 5.31 H 80
Min. bore (mm)20Min. bore (in)0.79Max. bore (mm)54Max. bore (in)2.13Flange A (mm)135Flange A (in)5.31H80
Min. bore (in) 0.79 Max. bore (mm) 54 Max. bore (in) 2.13 Flange A (mm) 135 Flange A (in) 5.31 H 80
Max. bore (m) 54 Max. bore (in) 2.13 Flange A (mm) 135 Flange A (in) 5.31 H 80
Max. bore (iiii) 2.13 Max. bore (iii) 2.13 Flange A (mm) 135 Flange A (in) 5.31 H 80
Flange A (mm) 135 Flange A (in) 5.31 H 80
Flange A (in) 5.31 H 80
H 80
· · · · · · · · · · · · · · · · · · ·
H (in) 3.15
F 85.5
F (in) 3.37
L 100
L (in) 3.94
Weight (kg) 8.66

 ® SKF is a registered trademark of the SKF Group
 © SKF Group 2012
 The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

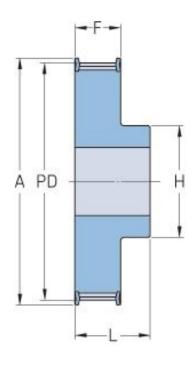

Weight (I	os)
-----------	-----

19.09

® SKF is a registered trademark of the SKF Group
© SKF Group 2012
The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

