
Pulleys Metric timing T5

PHP 27-T5-48RSB



No. of teeth48Pitch diameter (mm)76.39Outside diameter (mm)75.55(mm)1Pulley type1Min. bore (mm)8Max. bore (mm)32Flange A (mm)-H50F21L27Weight (kg)0.28		
Internationation(mm)Outside diameter (mm)Pulley type1Min. bore (mm)8Max. bore (mm)32Flange A (mm)-H50F21L27	No. of teeth	48
Outside diameter (mm)75.55Pulley type1Min. bore (mm)8Max. bore (mm)32Flange A (mm)-H50F21L27		76.39
Outside diameterProcession(mm)1Pulley type1Min. bore (mm)8Max. bore (mm)32Flange A (mm)-H50F21L27	(mm)	
Min. bore (mm) 8 Max. bore (mm) 32 Flange A (mm) - H 50 F 21 L 27		75.55
Max. bore (mm) 32 Flange A (mm) - H 50 F 21 L 27	Pulley type	1
Flange A (mm) - H 50 F 21 L 27	Min. bore (mm)	8
H 50 F 21 L 27	Max. bore (mm)	32
F 21 L 27	Flange A (mm)	-
L 27	Н	50
L	F	21
Weight (kg) 0.28	L	27
	Weight (kg)	0.28

® SKF is a registered trademark of the SKF Group
© SKF Group 2012
The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

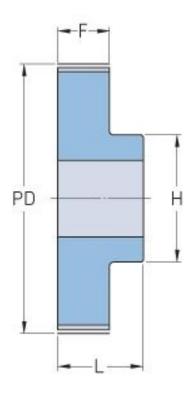