


PHF FX30-24X28

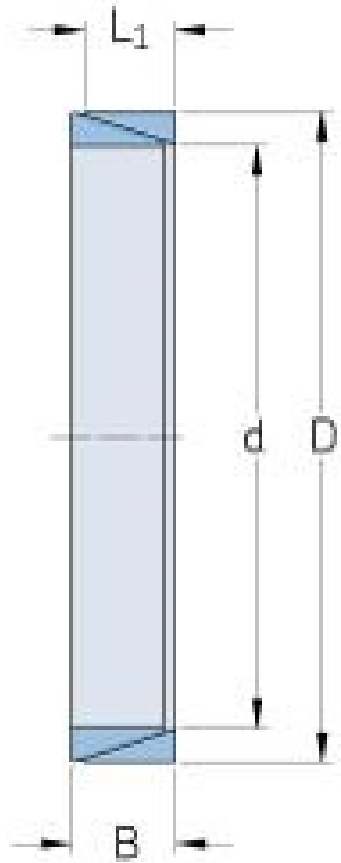

Bushing no.	FX30
d (mm)	24
d (in)	0.94
D (mm)	28
d _w (mm)	-
L (mm)	-
L ₁ (mm)	5.3
L ₂ (mm)	-
L ₃ (mm)	-
B (mm)	6.3
D ₁ (mm)	-
d ₁ (mm)	-
e (mm)	-
F _t Transmissible axial force (kN)	6.13
M _t Transmissible torque (Nm)	73

® SKF is a registered trademark of the SKF Group

© SKF Group 2012

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

P_w Shaft surface pressure (N/mm ²)	130
P_n Hub surface pressure (N/mm ²)	110
Clamp screws Qty	-
Clamp screws size	-
Clamp screws nut	-
M_s Screw tightening torque (Nm)	-
Weight (kg)	0.008