


PHF FX60-140X190

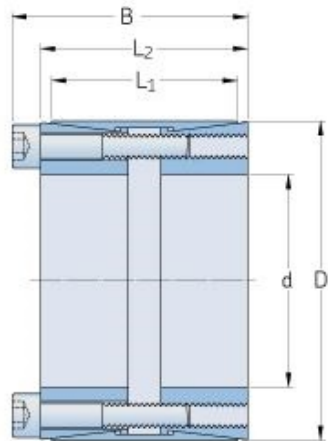

Bushing no.	FX60
d (mm)	140
d (in)	5.51
D (mm)	190
d _w (mm)	-
L (mm)	-
L ₁ (mm)	104
L ₂ (mm)	116
L ₃ (mm)	-
B (mm)	130
D ₁ (mm)	-
d ₁ (mm)	-
e (mm)	-
F _t Transmissible axial force (kN)	923
M _t Transmissible torque (Nm)	64600
P _w Shaft surface pressure (N/mm ²)	168
P _n Hub surface pressure (N/mm ²)	124
Clamp screws Qty	14
Clamp screws size	M14
Clamp screws nut	-
M _s Screw tightening torque (Nm)	230
Weight (kg)	10.2

® SKF is a registered trademark of the SKF Group

© SKF Group 2012

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

® SKF is a registered trademark of the SKF Group
© SKF Group 2012

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

